
PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR

PRODUCT DATA SHEET

FOR MORE CAD DETAILS SCAN HERE

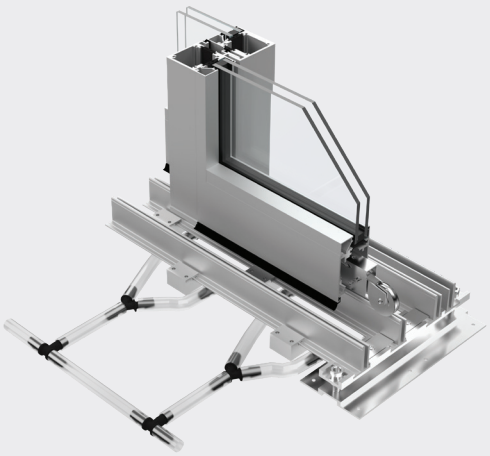

Performance Series 7600 Multi-Slide Door With Water Management Sill

The Series 7600 Multi-Slide Door with Water Management Sill features large, unobstructed rolling glass panels that stack flush to create extra-wide openings with seamless flooring transitions to connect indooroutdoor commercial and living spaces. And even with extreme panel sizes, it is easy to operate, thanks to high-performance sealed bearing polymer rollers. The aluminum frame's clean lines, narrow profile, and high-quality anodized or painted finishes deliver a contemporary aesthetic that seamlessly blends into nearly any space, while managing water penetration through an innovative hidden subfloor drain system.

Energy Efficiency

- Low-E, argon-filled dual-paned, triple-paned glass
- .32 U-value

Hardware

- 1.81" tandem roller
- 1.81" Quad-Zilla roller
- Water management sill
- Flush-mounted handle
- Premium handle
- Contemporary handle
- Concealed locking system

Options

Sealed bearing polymer rollers, flush-mounted handle, contemporary handle, optional keyed lock. Hidden stainless steel multi-point lock ensures reliability.

Finishes and Colors

Finishes are available in-stock or as designer selections, and they can be customized to match nearly any color. Split finishes are available in many combinations. Bronze Anodized and Satin Anodized come standard with a Class 1 coating thickness for increased smoothness and durability. Our designer colors include a high-quality paint finish that conforms to a minimum rating of AAMA-2605, currently the highest rating for organic finishes.

Performance Table


Frame Depth	2.87" Per Track
AAMA Product Designation (AAMA/WDMA/CSA101/I.S.2/A440 Designation)	CW-PG50 - 108" x 84"- SD
Test Configuration	108" x 84" XXO
Air Infiltration (Per ASTM E 283)	0.06 cfm/sf @ 1.57 psf
CSA A440 Air	N/A
Water Resistance (Per ASTM E 547)	9.0 psf
Forced Entry Resistance	ASTM F842 Type B Grade 10
U-Factor (Per NFRC 100)*	0.32
CR (Per NFRC 500)*	57
CRF Frame (Per AAMA 1503)	N/A


Actual values may vary depending on product specifications and configuration.
* Glass Makeup = 1" OA E366/Argon/Clear

PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR

PRODUCT DATA SHEET

FOR MORE CAD DETAILS SCAN HERE

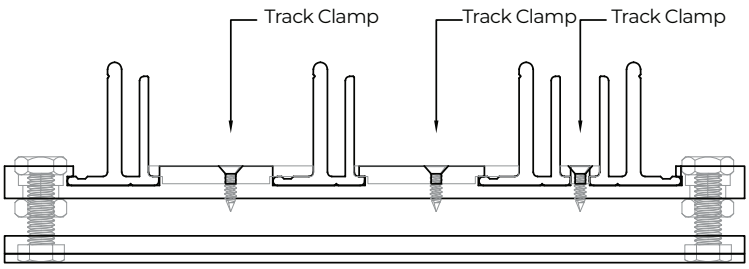

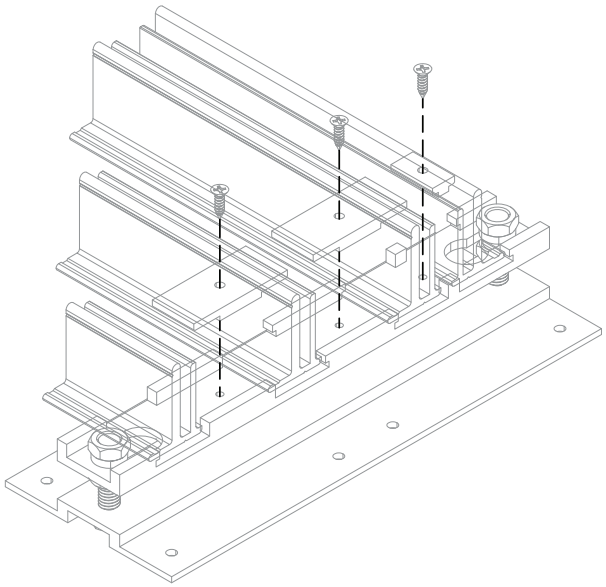



Threshold Condition At Track Clamps

PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR

PRODUCT DATA SHEET

FOR MORE CAD DETAILS SCAN HERE

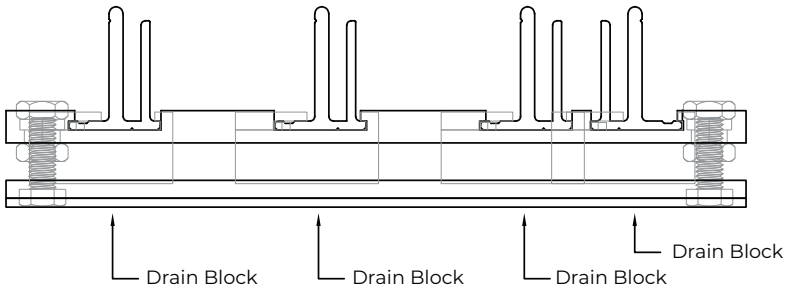

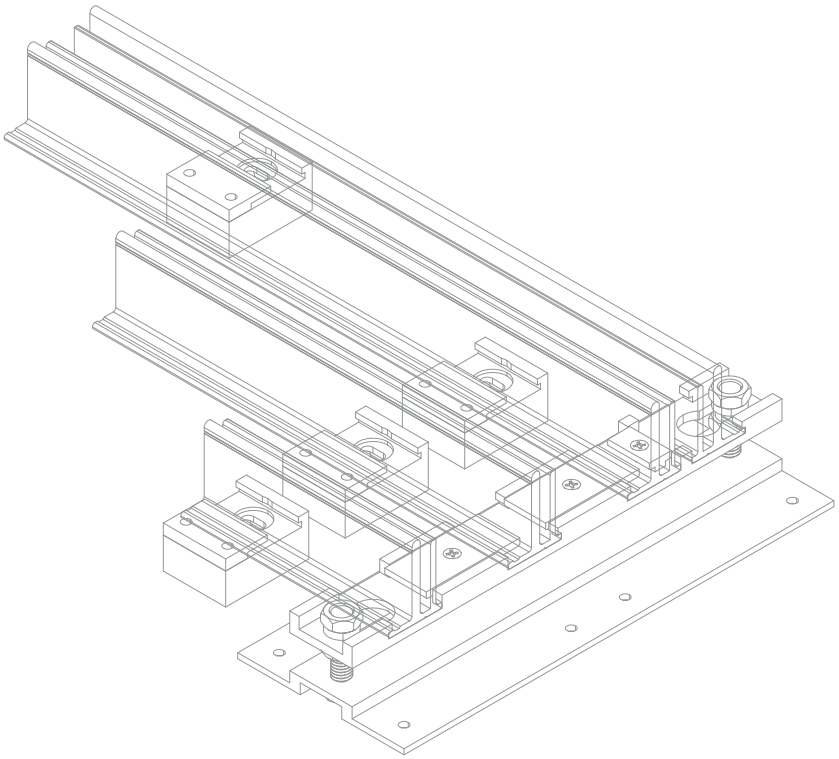


Threshold Condition At Drain Block


PERFORMANCE SERIES 7600
WATER MANAGEMENT SILL
MULTI-SLIDE DOOR

PRODUCT DATA SHEET

FOR MORE
CAD DETAILS
SCAN HERE

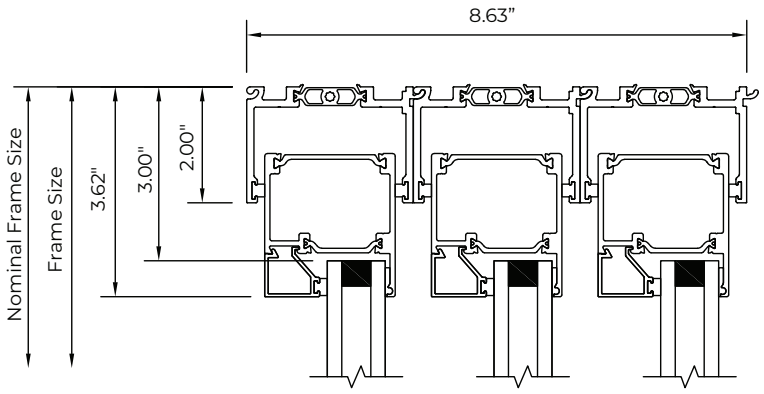

Head Condition

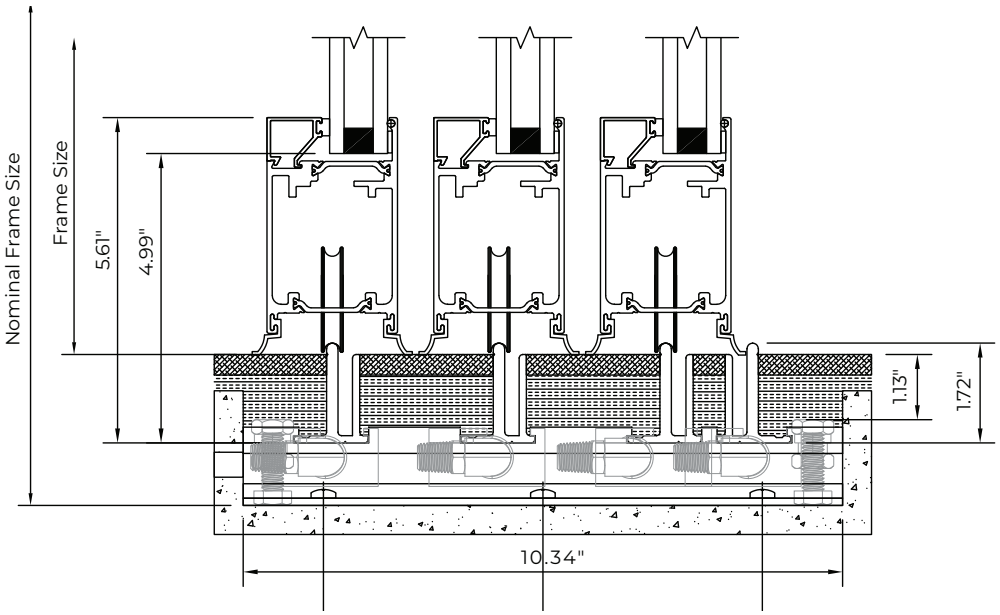


Threshold Condition


PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR

PRODUCT DATA SHEET


FOR MORE CAD DETAILS SCAN HERE

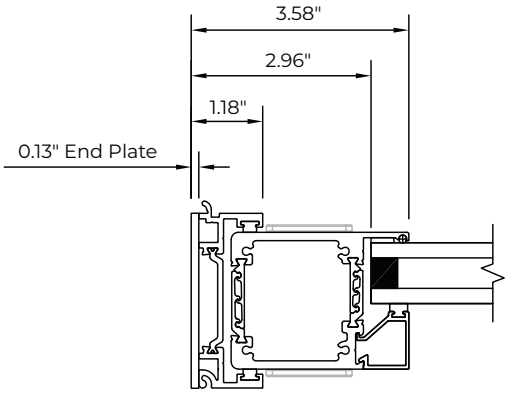


Left Jamb Condition

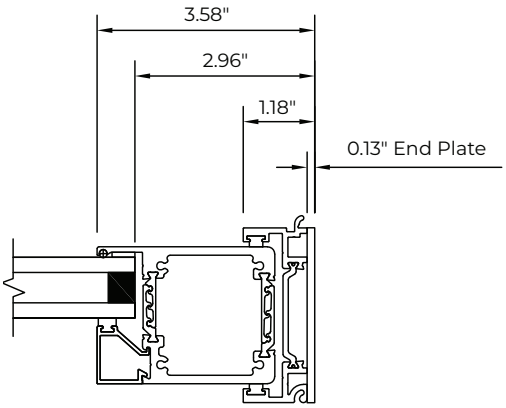

Right Jamb Condition

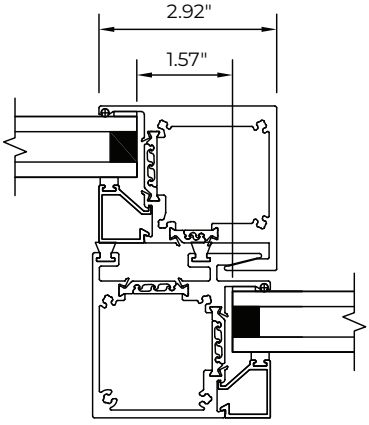

Interlocking Condition




Full Jamb Condition TYP

PERFORMANCE SERIES 7600
WATER MANAGEMENT SILL
MULTI-SLIDE DOOR

PRODUCT DATA SHEET

FOR MORE
CAD DETAILS
SCAN HERE

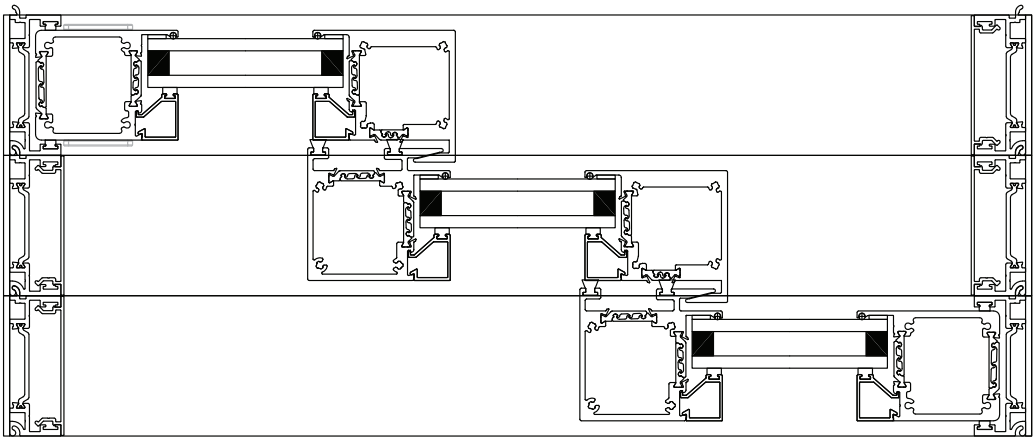


Horizontal Section Of 3-Panel Stacking Door Or 2XO

PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR

PRODUCT DATA SHEET

FOR MORE CAD DETAILS SCAN HERE

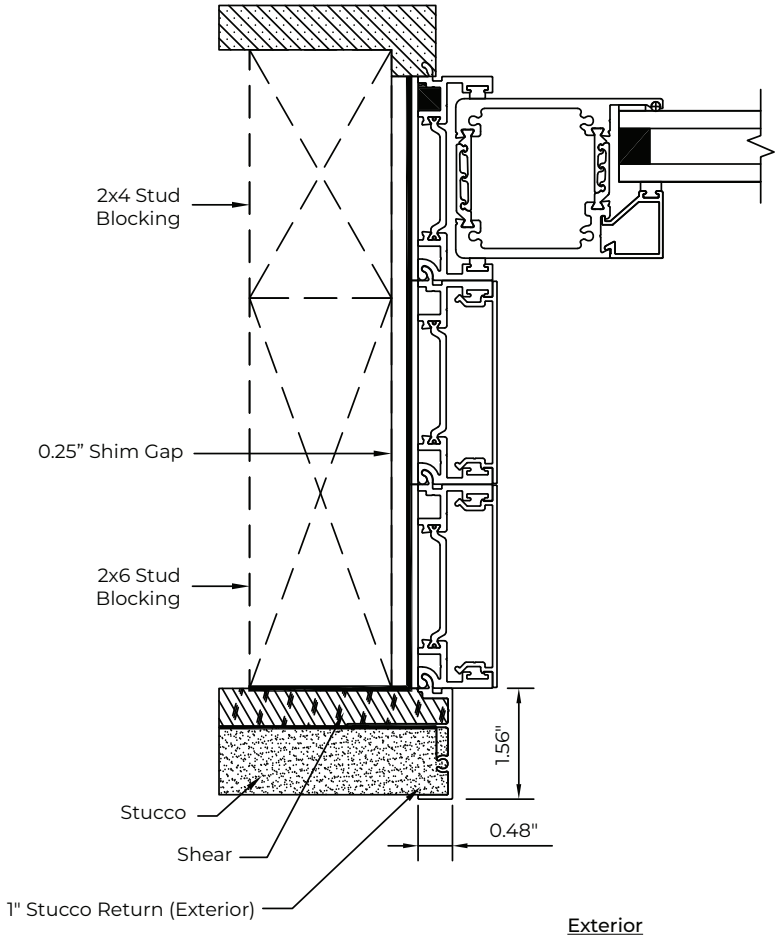


1" Stucco Return Wall Construction Profile At Stud
Multi-Slide Door Jamb Application

PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR

PRODUCT DATA SHEET

FOR MORE CAD DETAILS SCAN HERE

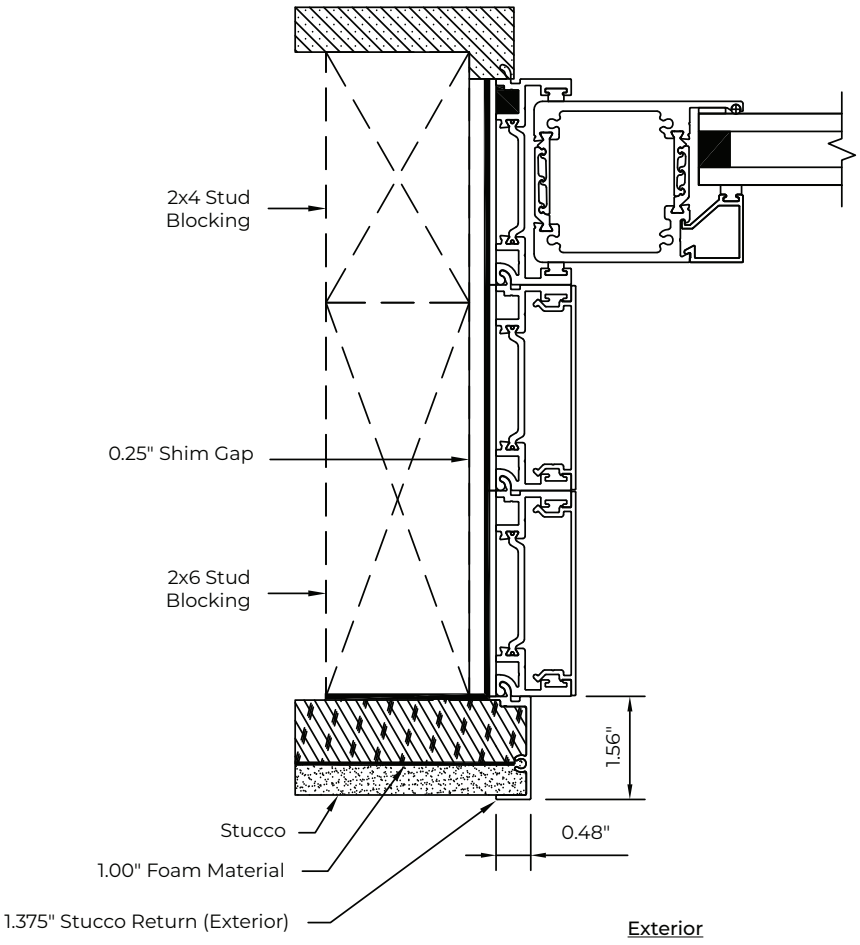

1.375" Stucco Return Wall Construction Profile At Stud Multi-Slide Door Jamb Application